




ADFIL
Construction Fibres

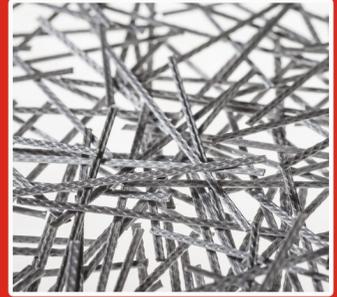

DURUS® PAVE

DURUS® FLOOR

Macro Fibre

Paving Systems

for

External & Internal

Applications

This includes Placing, Finishing, Additional
reinforcement and Batching instructions



Scan here for additional information

UK Office: Adfil Ltd 6th Floor, 9 Appold Street,
London, EC2A 2AP.

UK Customer Services & Orders

Tel: +44 (0)1482 274777 or E-mail: Orders@adfil.com

Reinforced concrete reinvented

Belgium Office: Adfil NV Industriestraat, 39 9240,
Zeleveld Belgium

Belgium Office Tel: +32 52 24 00 00

www.adfil.com



DURUS® EasyFinish

MACRO SYNTHETIC FIBRES



Designers and contractors around the globe appreciate the advantages of macro synthetic fibres over steel mesh for concrete reinforcement. Durus EasyFinish has been developed to facilitate effective post crack residual flexural strength, crack control whilst allowing a high quality surface finish and is suitable for use in all concrete mixes for the most demanding applications.

Advantages & Benefits

Durus® EasyFinish revolutionises reinforcement in concrete:

- **Cost effective reinforced concrete**
- **Faster construction**
- **Easy & safe to use**
- **Proven performance**
- **High quality concrete surface finish**
- **Replaces steel mesh**

Finishing Tests

The finishability of **Durus® EasyFinish** has been tested in different applications, including flooring concrete mixes. The number of fibres visible on the surface was greatly reduced confirming the performance of the product. Durus EasyFinish has also proven successful for use in self-compacting concrete and precast applications, which require fibre free external faces.

The content of this promotional material is for information, illustration and marketing purposes only and is subject to change without notice. While we endeavour to keep the content of this promotional material up to date and correct, we make no guarantees, warranties or representations of any kind about the completeness, accuracy, reliability or suitability thereof. We exclude liability for any inaccuracy or error in the information or any action taken in reliance thereon by any party, whether potential purchaser or otherwise. It is your own responsibility to ensure that the information available through this promotional material meets your specific requirements. From time to time, our website may include links to third party websites. These links are provided for your convenience to provide further information. They do not signify that we endorse the websites. We accept no liability for the content of these websites. The content of our promotional material is owned by or licensed to us. This content includes, but is not limited to, design, layout, look, appearance and graphics. Reproduction is prohibited other than in accordance with the intellectual property laws of Belgium.

SB-ENG-EF-05/2022UK

UK Office: Adfil Ltd 6th Floor, 9 Appold Street, London, EC2A 2AP. **UK Customer Services & Orders**
Tel: +44 (0)1482 274777 or E-mail: Orders@adfil.com

Belgium Office: Adfil NV Industriestraat, 39 9240, Zele, Belgium
Belgium Office Tel: +32 52 24 00 00
www.adfil.com

Design Service

Durus® EasyFinish is the result of years of product development of the recognised DURUS macro fibre brand. Based on beam test data carried out at a range of dosages in accordance with EN 14651, Adfil Engineers can deliver bespoke design calculations covered by professional indemnity insurance for a wide range of projects.

General Applications

- **Industrial floors (Durus Floor)**
- **External paving (Durus Pave)**
- **NHBC house floor toppings**
- **Agricultural**
- **Marine & Coastal**
- **Ports & Docks**
- **Precast element toppings**

DURUS® PAVE

Paving System for External Applications



Background

Adfil Construction Fibres have developed a proven system of synthetic macro fibre reinforced concrete for use in external areas, replacing the need for traditional steel mesh. **DURUS PAVE** uses **2.5Kg m³** of **Durus® EasyFinish** Polypropylene Macro Fibre ready mixed into a suitable grade of concrete to ensure consistent and reliable performance for the Customer every time.

Application Areas

DURUS PAVE can be used in a wide variety of external applications:

- External ground supported slabs for pavements, yards and hard standings
- Farmyards and Agricultural roadways
- Car parks
- Domestic driveways



Direct discharge into formwork will reduce construction time



Large areas can be poured without having to negotiate in-situ steel mesh

The Key Features & Benefits

DURUS PAVE will give the following benefits when compared to traditional steel mesh reinforcement construction:

- **Ease of construction and reduced construction time**
- **The risk of reinforcement being placed incorrectly is eliminated as it is contained within the delivered concrete, at the correct dosage to ensure the required performance**
- **Elimination of significant Health & Safety hazards associated with the handling, cutting and fixing of steel mesh reinforcement**
- **A significant reduction in embedded carbon (60%) when compared to steel mesh construction.**
- **Can provide an overall cost saving compared to traditional construction methods.**

Installation

DURUS PAVE can be placed using conventional techniques such as direct discharge, skip or pump. There are no specialist handling requirements. To ensure the optimum performance of the end product, best practice compaction, finishing and curing techniques should be observed. It is strongly recommended that a curing membrane be applied to the concrete surface immediately after finishing to control moisture and ensure the concrete reaches its required strength specification.

*use of information see page 58-ENG-DURUSPave-05/2022UK statement

DURUS® PAVE

Paving System for External Applications



Embedded Carbon Savings

DURUS PAVE can be used in a wide variety of external applications. Using **DURUS PAVE** can result in significant carbon savings when compared to traditional steel mesh reinforcement.

The following table shows typical carbon savings using fibres compared to traditional steel mesh

Solution	Traditional Steel Mesh Reinforcement Type			
	A142	A193	A252	A393
DURUS PAVE 130	23%	43%	57%	72%
DURUS PAVE 160	5%	30%	47%	66%
DURUS PAVE 190		17%	36%	57%

Table showing carbon savings compared to traditional mesh types using **2.5Kg m³ of Durus® EasyFinish**

Technical Information

DURUS PAVE can be specified and installed based upon the following load and construction recommendations, complying with the stated design assumptions noted below:

Solution	Minimum Slab Thickness (mm)	Maximum Traffic Loadings	Maximum Joint Spacing (m)
DURUS PAVE 130	130	LGV / Car 3.5T 2 Axles	6
DURUS PAVE 160	160	HGV 40T 5 Axles	6
DURUS PAVE 190	190	HGV / Trailer 44T 6 Axles	6

DESIGN ASSUMPTIONS: Concrete grade C32/40; **2.5Kg m³ of Durus® EasyFinish**; Minimum sub-grade CBR = 5%; LGV/HGV data from UK Department of Transport 2003; For loadings outside these parameters contact **Adfil** for specialist advice

Joint recommendations can be obtained via the full paving guide


"The content of this promotional material is for information, illustration and marketing purposes only and is subject to change without notice. While we endeavour to keep the content of this promotional material up to date and correct, we make no guarantees, warranties or representations of any kind about the completeness, accuracy, reliability or suitability thereof. We exclude liability for any inaccuracy or error in the information or any action taken in reliance thereon by any party, whether potential purchaser or otherwise. It is your own responsibility to ensure that the information available through this promotional material meets your specific requirements. From time to time, our website may include links to third party websites. These links are provided for your convenience to provide further information. They do not signify that we endorse the websites. We accept no liability for the content of these websites. The content of our promotional material is owned by or licensed to us. This content includes, but is not limited to, design, layout, look, appearance and graphics. Reproduction is prohibited other than in accordance with the intellectual property laws of Belgium.

SB-ENG-DURUSPave-05/2022UK



DURUS® FLOOR

Flooring System for Internal Applications

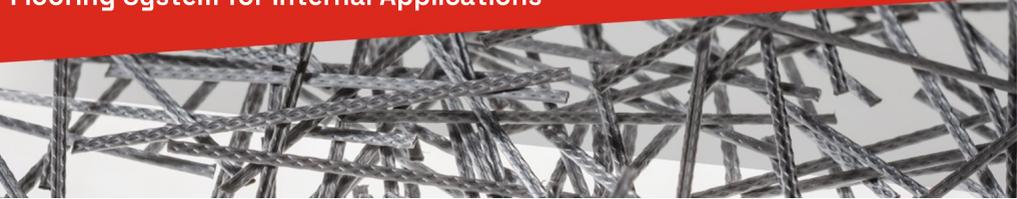

Background

Adfil Construction Fibres have developed a proven system of synthetic macro fibre reinforced concrete for use in internal areas, replacing the need for traditional steel mesh. **DURUS FLOOR** uses **2.5Kg m³** of **Durus® EasyFinish** Polypropylene Macro Fibre ready mixed into a designated grade of concrete to ensure consistent and reliable performance for the customer every time.

Application Areas

DURUS FLOOR can be used in a wide variety of industrial and domestic applications:

- **General industrial flooring**
- **Workshops**
- **Agricultural buildings**
- **Domestic floors**
- **Warehouses**

The Key Features & Benefits

DURUS FLOOR will give the following benefits when compared to traditional steel mesh reinforcement construction:

- **Ease of construction and reduced construction time**
- **The risk of reinforcement being placed incorrectly is eliminated as it is contained within the delivered concrete, at the correct dosage to ensure the required performance**
- **Elimination of significant Health & Safety hazards associated with the handling, cutting and fixing of steel mesh reinforcement**
- **A significant reduction in embedded carbon (60%) when compared to steel mesh construction**
- **Can provide an overall cost saving compared to traditional construction methods**



DURUS Floor can be used in a wide variety of Internal Applications



A quality power float finish is easily achieved with the **DURUS Floor** system

Installation

DURUS FLOOR can be placed using conventional techniques such as direct discharge, skip or pump. There are no specialist handling requirements. To ensure the optimum performance of the end product, best practice compaction, finishing and curing techniques should be observed. It is strongly recommended that a curing membrane be applied to the concrete surface immediately after finishing to control moisture and ensure the concrete reaches its required strength specification.

*use of information see page 58-ENG-DURUSFloor-05/2022UK statement

DURUS® FLOOR

Flooring System for Internal Applications



Embedded Carbon Savings

DURUS Floor can be used in a wide variety of internal applications. Using **DURUS Floor** can result in significant carbon savings when compared to traditional steel mesh reinforcement.

The following table shows typical carbon savings using fibres compared to traditional steel mesh

Solution	Traditional Steel Mesh Reinforcement Type			
	A142	A193	A252	A393
DURUS FLOOR 130	23%	43%	57%	72%
DURUS FLOOR 160	5%	30%	47%	66%
DURUS FLOOR 190		17%	36%	57%

Table showing carbon savings compared to traditional mesh types using **2.5Kg m³ of Durus® EasyFinish**

Technical Information

DURUS FLOOR can be specified and installed based upon the following load and construction recommendations, complying with the stated design assumptions noted below:

Solution	Minimum Slab Thickness (mm)	Maximum Point Load (T)	Maximum Fork-lift Capacity (T)	Maximum Wall Load (T)	Maximum Joint Spacing (m)
DURUS FLOOR 130	130	2	2	2	6
DURUS FLOOR 160	160	3	3	3	6
DURUS FLOOR 190	190	4	4	4	6

DESIGN ASSUMPTIONS: Concrete grade C32/40; **2.5Kg m³ of Durus® EasyFinish**; Minimum sub-grade CBR = 5%; LGV/JGV data from UK Department of Transport 2003; For loadings outside these parameters contact **Adfil** for specialist advice

Joint recommendations can be obtained via the full flooring guide

*The content of this promotional material is for information, illustration and marketing purposes only and is subject to change without notice. While we endeavour to keep the content of this promotional material up to date and correct, we make no guarantees, warranties or representations of any kind about the completeness, accuracy, reliability or suitability thereof. We exclude liability for any inaccuracy or error in the information or any action taken in reliance thereon by any party, whether potential purchaser or otherwise. It is your own responsibility to ensure that the information available through this promotional material meets your specific requirements. From time to time, our website may include links to third party websites. These links are provided for your convenience to provide further information. They do not signify that we endorse the websites. We accept no liability for the content of these websites. The content of our promotional material is owned by or licensed to us. This content includes, but is not limited to, design, layout, look, appearance and graphics. Reproduction is prohibited other than in accordance with the intellectual property laws of Belgium.

SB-ENG-DURUSFloor-05/2022UK



ADFIL
Construction Fibres

Macro Fibre

Finishing & Placing Guide

DURUS® PAVE

DURUS® FLOOR





DURUS® PAVE & FLOOR

Finishing & Placing Fibre Concrete



With this document we want to offer the simple guidelines that can lead to a fibre free surface. Exposed fibres are your assurance of a properly distributed three-dimensional reinforcement before the concrete is finished. Any fibres that appear on the surface will quickly wear off under light traffic or degrade due to UV radiation.

Concrete mix

Creating the perfect finish for a fibre reinforced concrete floor starts with optimising the concrete mix design. Concrete mix should be supplied by a certified QSRMC Ready Mix Concrete Supplier, with supporting batch records to demonstrate required compressive strength, minimum cement content, maximum water cement ratio.

By increasing the amount of fine aggregate (0-4mm) in concrete the fibre-concrete matrix will have a better grip on the fibre, more mortar will hold the fibre in place once pushed under the surface. We advise to use a concrete mix design which contains at least 45% of fine aggregate for slump concrete. For concrete which will be power floated we advise a minimum of 47.5% of fine aggregate and a minimum of 350kg of cement. This ensures sufficient fat is available after placement and compaction to ensure fibre suppression below the fresh concrete surface. Typically self-compacting concrete will contain more fines and paste, so the mix design does not need to be changed.

Consistence should be suitable to allow pumping if necessary, generally S3 – S4, confirmed by the concrete supplier. This should be confirmed by appropriate consistence testing by an appointed, qualified Technician, using standard test apparatus, complying to the relevant BS EN Test Standard. If excessive bleed is evident, the mix should be rejected and the concrete supplier notified accordingly. If consistence is not within required tolerance, the mix should also be rejected. Under no circumstances should water be added to the concrete mixer drum under instruction from the Contractor.

Mixing

DURUS Macro Fibres should be added to the concrete during batching in accordance with recommended mixing guidance. Mix trials should be carried out to ensure the procedure followed results in consistent fibre dispersion without balling, at the specified dosage. Preferably this should be determined from a design provided by ADFIL Engineers.

Installation

Upon discharge, the fresh DURUS reinforced concrete, should be placed in situ without segregation. This may be via pumping or direct discharge in to formwork. This may result in the propagation of fibres to the concrete surface by capillary action which will lead to surface fibres interfering with power floating operations.

Preferably a laser screed should be used to complete level and compaction, but a portable mechanical screed (magic screed) is also suitable. Full compaction will allow sufficient paste (Fat) to be brought to the surface of the fresh concrete in order to suppress the fibres below the surface and also align fibres in the top area of the concrete to be aligned horizontally below the surface. This is critical if a high quality powerfloat finish is to be achieved.

UK Office: Adfil Ltd 6th Floor, 9 Appold Street, London, EC2A 2AP. **UK Customer Services & Orders**
Tel: +44 (0)1482 274777 or E-mail: Orders@adfil.com

Belgium Office: Adfil NV Industriestraat, 39 9240, Zele, Belgium
Belgium Office Tel: +32 52 24 00 00
www.adfil.com



Readymix Supplier



Durus Macro fibre concrete mix



Pouring concrete



Laser screed



DURUS® PAVE & FLOOR

Finishing & Placing Fibre Concrete



Timing

Flowing concrete

Flowing concrete should be dappled as soon as it is practically possible. Be careful NOT to use a round skip for this type of concrete as this will push the fibres back up at the end of the skip. Using a flat skip helps to push down the fibres.

Slump concrete

Once the concrete has been poured, the timing of finishing is very important. The concrete needs to have a certain resistance in order to keep a fibre down. The easiest way to check this is to manually push down a fibre and see whether it stays under. If it does, the concrete can be finished.

Ways of finishing

Before finishing, dynamic compaction using appropriate site equipment, like a twin beam compacting screeder or razor back, should be undertaken to ensure full compaction of the slab or topping to full depth, without over compaction which could result in segregation and excessive bleed. Poker vibrators should not be used as this has a tendency to pull fibres vertically out of the surface when pulling the vibrator in and out of the concrete. Hand screed bar, magic screeder can be used as if it were a conventional reinforced concrete.

Skip float

A skip float is to be used to close the surface and to correct any small surface irregularities left by the compacting beam. This should occur soon after compaction when some of the surface moisture has evaporated and the concrete has started to stiffen. Each pass should overlap the previous one by about 50mm. The fibres in the surface will be pushed down due to the skip float movement. This will create a nice fibre free surface.

When a rougher surface need to be applied to provide more friction a brushed finish can be applied. Fibres in the surface will be aligned in the brush direction and will be less visible.

Rollerbug

We advise to use a rollerbug as it will provide a more durable concrete finish as it does not open up the protecting upper concrete paste. The rollerbug will also provide the perfect preparation for powerfloating



**Use a Dapple to finish
SCC**



Vibro Float



Skip Float



Rollerbug



DURUS® PAVE & FLOOR

Finishing & Placing Fibre Concrete



Powerfloating

With power floating it is down the quality and skill of the workforce laying the concrete, and the quality of the concrete delivered by your supplier. The only rule we ask the readymixers to adhere to is to ensure there is 45 - 50% fines in the concrete so that there is enough concrete paste (fat) on the top surface.

Also to ensure the correct agitating tool is used for example a concrete poker or magic screeder or vibrating screed bar. Nothing really more that they should use for normal concrete. The correct tools for agitation is to ensure there is around 3mm of fat on top of the area that you are going to power float. So when you initially float it the fibres get pushed down.

The fibres in the surface should be pushed down with a skipfloat or a rollerbug prior to powerfloating the surface. This will avoid fibres sticking out of the surface after powerfloating. Typical site practice is to test the concrete's readiness for power floating by measuring the indentation of the operator's foot: if the indentation is 2mm or less generally the slab is then power floated. It must be noted that the ambient temperature and the concrete mix design may affect power-floating times.

Beware not to set the knives of the powerfloat to deep in the concrete as this might mix the thin upper layer with fibres again. The Contractor should ensure that powerfloat finishing is not carried out prematurely as this will remove the closed surface fat required to ensure a high quality fibre free finished surface.

Powerfloating operations should only be carried out by competent and experienced operatives as appointed under the responsibility of the Contractor. The surface should not be over panned as this could lead to delamination and dusting of the concrete surface when trafficked.

Optionally 3-5kg of quartz sand can be added to every square meter of the surface. It is applied to the concrete when it is at the panning stage prior to powerfloating. This will add a layer of 2mm with hard wearing characteristics and increased impact resistance. It will also help to push any remaining fibre down before powerfloating.

Laser guided screed

No actual extra care needs to be taken into account. When the floor is powerfloated after levelling with the laser, please take the above mentioned advise into account.

UK Office: Adfil Ltd 6th Floor, 9 Appold Street, London, EC2A 2AP. **UK Customer Services & Orders**
Tel: +44 (0)1482 274777 or E-mail: Orders@adfil.com

Belgium Office: Adfil NV Industriestraat, 39 9240, Zele, Belgium
Belgium Office Tel: +32 52 24 00 00
www.adfil.com



Power floating concrete



Laser guided screed



Too wet to pan



Ready to start Panning

DURUS® PAVE & FLOOR

Finishing & Placing Fibre Concrete

Curing the concrete

All concrete must be cured. Curing is the process of ensuring that there is sufficient water present to allow hydration of the cement throughout its life. For all categories of slabs, it is essential that all normal good curing procedures be strictly followed.

We strongly advise to cure the concrete as soon as is practically possible using a proprietary spray applied membrane forming compound. This will avoid water evaporating out of the concrete surface too quickly.

Saw cut joint installation

Saw cut joints should be made within 24hrs of powerfloat finishing, 1/3 of slab / topping depth, or 50mm, whichever is greater. This is critical to ensure uncontrolled cracking does not occur due to shrinkage during final set.

Finishing Trials

Should you be in any doubt about your method of finishing fibre reinforced concrete then we advice that you arrange trial mixes with your readymix supplier. The Adfil technical team will be more than happy attending to offer first hand specialist advice.



Curing Concrete



Applying saw cuts within 24 hours



Trail bed being poured

DURUS[®] PAVE & FLOOR

Additional Reinforcement & Recommended

Joint details



Guideline for Joint Installation and Supplementary Reinforcement in DURUS[®] Fibre Reinforced Concrete Slabs

Joint Layout Considerations:

In an ideal joint layout plan, the objective is to minimize the risk of cracks occurring, this is achieved by a combination of the following considerations:

- Maintaining bay aspect ratio to a maximum of 1:1.5, preferably having square bays.
- Avoiding re-entrant corners.
- Avoiding bay shapes with acute angles at corners.
- Avoiding restraint to shrinkage with the use of isolation details around fixed piits, such as service access.
- Avoiding point loads at joints.
- Limiting the distance between saw cut joints to a maximum of 6m.
- Limiting dimensions to a maximum of 35m for jointless bays and maximum of 50m for jointed bays, unless using long strip and wide bay construction.

Saw Cut Joints:

- Saw cut joints induce a plane of weakness in the concrete to dictate where cracking
- Saw cut joints are usually 3-4mm wide.
- They should be cut as soon as practicable after placing the concrete, ensuring it is strong enough to avoid any damage during the sawing process.

(Normally 24hrs after placement and finishing)

- They are cut at between 25-30% of slab depth.



DURUS® PAVE & FLOOR

Additional Reinforcement & Recommended
Joint details




Additional Supplementary Reinforcement

The following is a guide only when using Adfil Macro Fibre reinforcement in ground bearing slab applications. It is important to ensure the correct measures are taken to avoid defects around services, re-entrants, columns & other details as per best practice.

Columns:

Manholes, Services

3 Bars Ø 8mm in both directions
50mm spacing, placed at 1/3 slab depth
Bars must cross each other

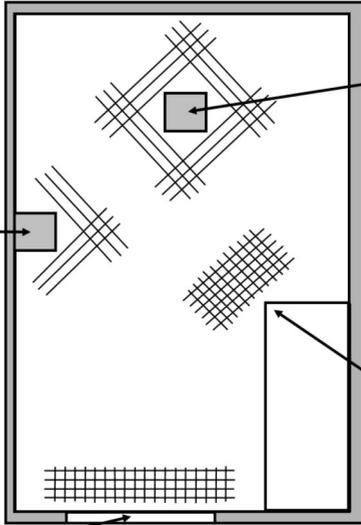

Columns:

Manholes, Services

3 Bars Ø 8mm in both directions
50mm spacing, placed at 1/3 slab depth
Bars must cross each other

Corner Walls:

1 Piece A142 welded steel mesh
placed at 1/3 slab depth
AT LEAST 35mm from edge





Door Openings:

1 Piece A142 welded steel mesh
placed at 1/3 slab depth
Must be 1m+ longer than opening on both sides

Free Movement of the Slab:

Use 20mm EPS plate around all edges and corners.
There should be no bars between floor & foundations

Recommended joint details

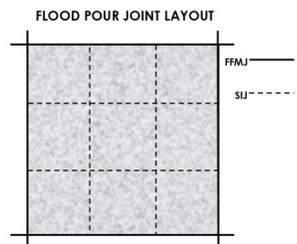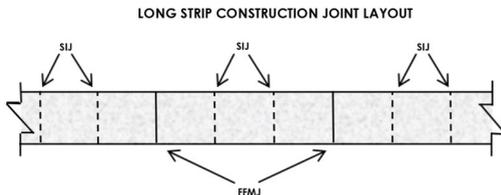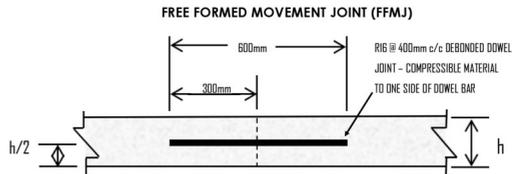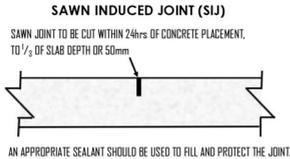



ADFIL
Construction Fibres



Macro Fibre

Fibre Concrete

Batching Guide

DURUS® PAVE

DURUS® FLOOR

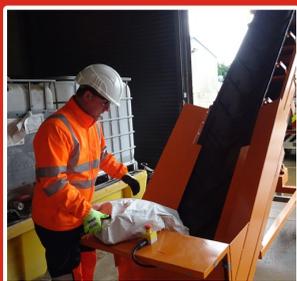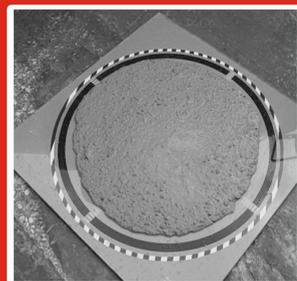

Suggested Mixing Procedure for Durus® Macro

When adding this fibre into concrete, careful attention must be taken with the batching and mixing procedure.



The suggested procedures below are based upon our own testing. However, experience suggests that different concrete plants, trucks and materials may give varying results and we therefore advise that individual plant trials are

For Dry Batch Plants:

- Load the truck mixer with all ingredients **excluding the fibres**
- Add **1 bag** of Macro fibres approximately every **30 seconds** (**Not all at once**)
- Mix the truck at **full speed for 4-5 minutes** before you leave for site
- Check your load and leave or carry out any required testing.



Adding Fibre to the back of the truck

For Wet Batch Plants:

- **Add the fibres in the plant mixer with the other concrete ingredients**, Take into account your general safety procedures.
 - Either directly into the plant mixer**
 - Or onto the aggregate conveyor**
- Check your load and leave or carry out any required testing.



Adding Fibre to the mixer

If the **Fibres cannot** be added to the plant mixer then the **Dry Batch** Plant mixing procedure is suggested.

The **Durus** bags are made of pulpable paper and can be added directly into your concrete.

NOTE: If you are adding in micro fibres as well, refer to the micro fibre mixing procedure.



Final 5 minute mix at full speed

Batching films are available via our website www.adfil.com

Suggested Mixing Procedure for Adfil® Micro

When adding this fibre into concrete, careful attention must be taken with the batching and mixing procedure.



The suggested procedures below are based upon our own testing. However, experience suggests that different concrete plants, trucks and materials may give varying results and we therefore advise that individual plant trials are

For Dry Batch Plants:

- Add 1/3 of your mixing water to the truck mixer
- Add **1 bag** of Micro fibres approximately every **30 seconds** (**Not all at once**) whilst the barrel is rotating.
- Add in your concrete materials
- Check your load and leave or carry out any required testing.



Adding Fibre to the back of the truck

For Wet Batch Plants:

- **Add the fibres in the plant mixer with approximately 1/3 of your mixing water.** Take into account your general safety procedures.
 - i : **Either directly into the plant mixer**
 - ii : **Or onto the aggregate conveyor**
- **Add** the other concrete ingredients,
- Check your load and leave or carry out any required testing.



Adding Fibre to the mixer

If the Fibres cannot be added to the plant mixer then the **Dry Batch** Plant mixing procedure is suggested.

The **Micro fibre** bags are made of pulpable paper and can be added directly into your concrete.




Final 5 minute mix at full speed

Batching films are available via our website www.adfil.com



UK Technical Sales

Assistance

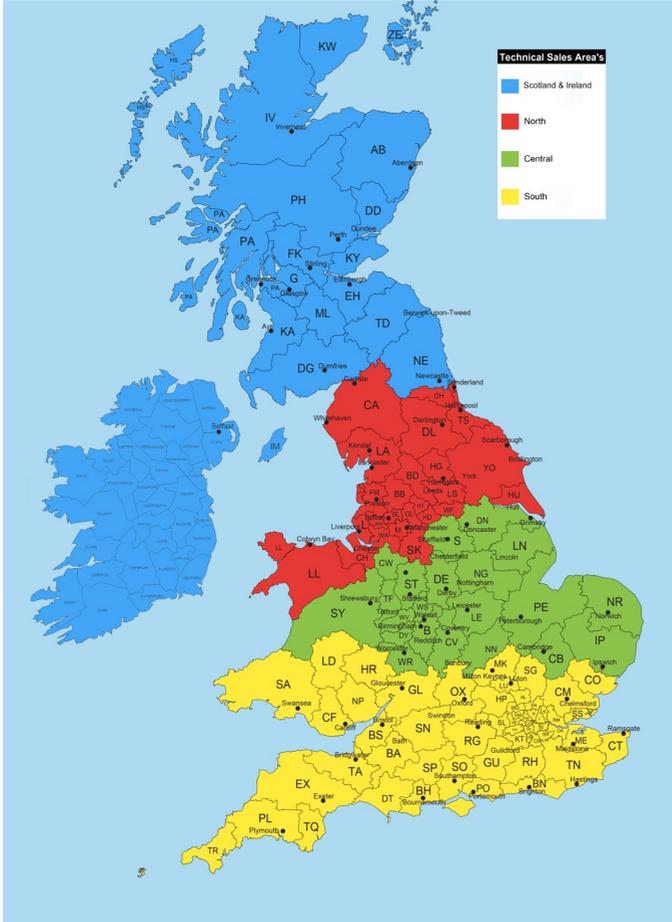

For any assistance please contact one of the following to get appropriate technical support:

Scotland & Ireland :
+44 (0)7516506016

Northern :
+44 (0)7785616975

Central :
+44 (0)7801300966

Southern :
+44 (0)7824015717

National :
+44 (0)7801595581

Customer Service T: +44 (0) 1482 274777 E: orders@adfil.com

Reinforced concrete reinvented

The content of this promotional material is for information, illustration and marketing purposes only and is subject to change without notice. While we endeavour to keep the content of this promotional material up to date and correct, we make no guarantees, warranties or representations of any kind about the completeness, accuracy, reliability or suitability thereof. We exclude liability for any inaccuracy or error in the information or any action taken in reliance thereon by any party, whether potential purchaser or otherwise. It is your own responsibility to ensure that the information available through this promotional material meets your specific requirements. From time to time, our website may include links to third party websites. These links are provided for your convenience to provide further information. They do not signify that we endorse the websites. We accept no liability for the content of these websites. The content of our promotional material is owned by or licensed to us. This content includes, but is not limited to, design, layout, look, appearance and graphics. Reproduction is prohibited other than in accordance with the intellectual property laws of Belgium.

SB-ENG-UK-01/2021

UK Office: Adfil Ltd 6th Floor, 9 Appold Street, London, EC2A 2AP. **UK Customer Services & Orders**
Tel: **+44 (0)1482 274777** or E-mail: **Orders@adfil.com**

Belgium Office: Adfil NV Industriestraat, 39 9240, Zele, Belgium
Belgium Office Tel: +32 52 24 00 00
www.adfil.com